




CC6361P & CC6362P* TYPE 4 or 4X COMPACT CABINET COOLER AIR-TO-WATER FLUSH-MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC6361 / 6362*	32 lbs	21,800*	0.9	3 x 6"	29 x 13-7/8 x 7-7/8

Efficiency: 159.7 Watts / °C ΔT based on average internal cabinet temperature.

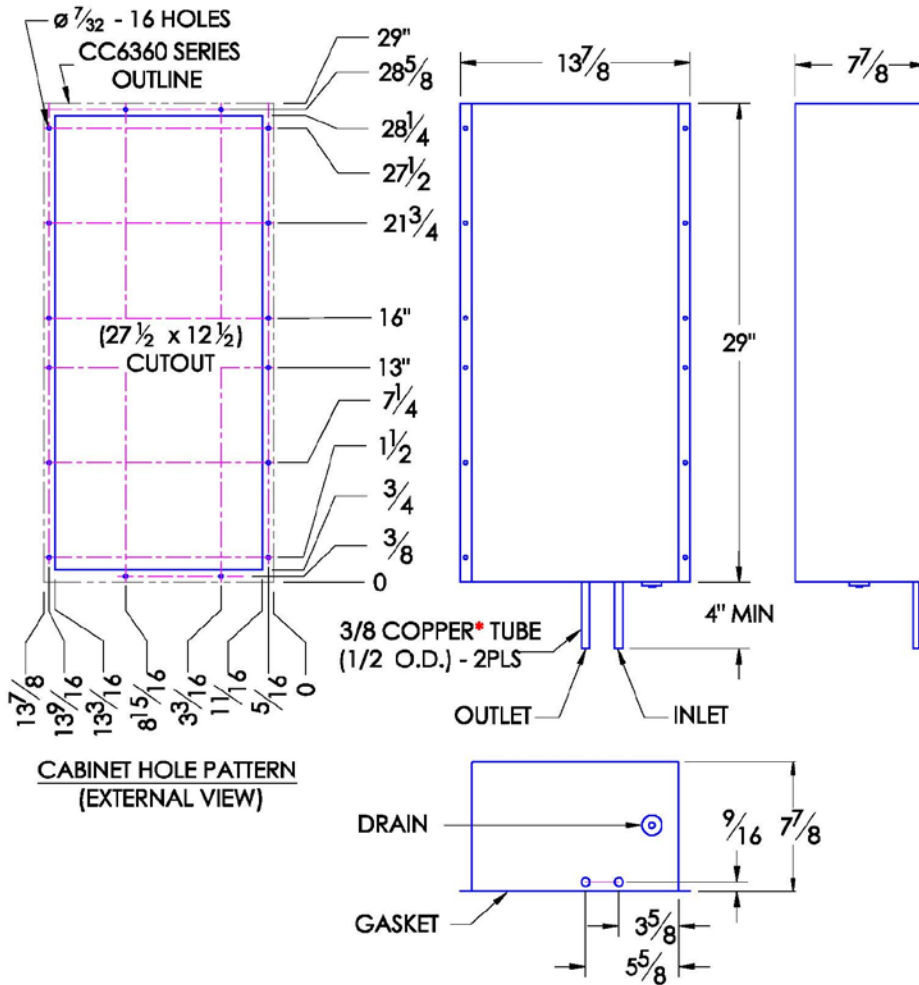

SPECIFICATIONS

- UL Listed for TYPE 4 or 4X environments.
- CC6361P Rated cooling: 6,389 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
- CC6362P HAS ALL TYPE 304 OR UNLESS SPECIFIED 316 STAINLESS STEEL WATER LINES THROUGHOUT UNIT.** Unit gives approx. 2% less thermal performance. (approx. 6,260 Watts or 21,400 BTU/hr.)
- Designed for surface mounting on the outside of cabinet.
- TYPE 4 housing is aluminum housing (color is black).
- TYPE 4X housing is type 304 or 316 stainless steel.
- External water inlet and outlet connections.
- Equipped with mounting gasket to maintain air tight seal.
- Pressure tested to assure water tight seal.
- Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
- Vertical mounting only.
- Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
- Recommended coolant flow rate (gallons per minute): 1 GPM
- For design, quote, and sizing assistance: call (866) 936 - 6736.**

Subject to change without notice.



THERMAL SOLUTIONS
NOREN
Products Incorporated

Noren Products, Inc.
1010 O'Brien Drive
Menlo Park, CA 94025
(650) 322 - 9500
www.norenproducts.com

CC6361P & CC6362P* TYPE 4 or 4X

CCS-PBD-7.2.2-883338-A